

## Stainless Steel Inner-Ring for ASFA S (12mm) Hose Clamps




W4

This inner-ring for ASFA S worm-drive clip with 12mm bandwidth was designed to give extra protection to the hose, especially where it comes into contact with the underside of the clamp housing.

Inner-rings are particularly recommended for use with silicone hoses which are quite fragile and can be cut easily. The inner-ring ensures a good fit, prevents damage to the hose and also contributes to an even distribution of pressure around the hose.

Application Ø						
mm	Stainless steel code	Black code	a +0,5	b	Box Quantity (MOQ)	Outer Packing
16-27	0303121-0	7303121-8	16,5	0,25	100	400
20-32	0303122-8	7303122-6	16,5	0,25	100	400
25-40	0303123-6	7303123-4	16,5	0,25	100	400
30-45	0303124-4	7303124-2	16,5	0,25	100	400
32-50	0303125-2	7303125-0	16,5	0,25	100	100
40-60	0303126-0	7303126-9	16,5	0,25	100	100
50-70	0303127-9	7303127-7	16,5	0,25	100	100
60-80	0303128-7	7303128-5	16,5	0,25	100	100
70-90	0303129-5	7303129-3	16,5	0,25	50	400
80-100	0303130-9	7303130-6	16,5	0,25	50	50
90-110	0303131-7	7303131-4	16,5	0,25	25	200
100-120	0303132-5	7303132-2	16,5	0,25	25	200
110-130	0303133-3	7303133-0	16,5	0,25	25	25
120-140	0303134-1	7303134-9	16,5	0,25	25	25
130-150	0303135-0	7303135-7	16,5	0,25	25	25
140-160	0303136-8	7303136-5	16,5	0,25	25	25
150-170	0303137-6	7303137-3	16,5	0,25	25	25
160-180	0303138-4	7303138-1	16,5	0,25	25	25
170-190	0303139-2	7303139-0	16,5	0,25	10	10
180-200	0303140-5	7303140-2	16,5	0,25	10	10
190-210	0303141-3	7303141-0	16,5	0,25	10	10
200-220	0303142-1	7303142-9	16,5	0,25	10	10
210-230	0303143-0	7303143-7	16,5	0,25	10	10
220-240	0303144-8	7303144-5	16,5	0,25	10	10

	TECHNICAL INFORMATION	
	<b>MATERIAL</b>	AISI 301
	<b>FINISH</b>	BLACK / STAINLESS STEEL
<b>CORROSION RESISTANCE</b>	400HOURS SALT SPRAY (ASTMB-117)	

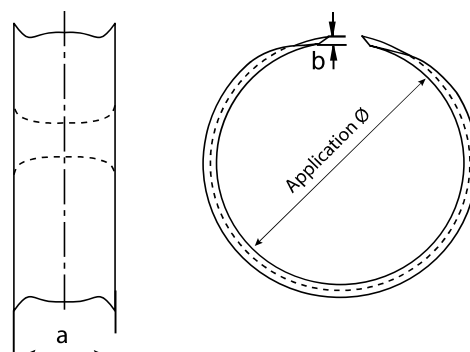



## Thumb Screw for ASFA L and S worm-drive clamps

Worm-drive clamps can be fitted relatively tightly, easily and quickly using this Thumb Screw, without the need for tools. Once the clamp has been tightened, the thumb screw can be removed. Manufactured in durable red plastic.

Application Ø	Width Screw (mm)	Part n°	Box Quantity (M00)	Outer Packing
All Ø available ASFA L and S	7	0217046-1	100	1.000



## Safety Cap for ASFA L and S worm-drive clamps

These Safety Caps for worm-drive hose clamps are a practical and quickly assembled solution which prevent injuries by protecting the band end. They are manufactured in two different colours which help to determine the material quality of the clamps: (Red: W1 and W2 - Blue: W3, W4 and W5).

Bandwidth	Part n°	Colour	Box Quantity (M00)	Outer Packing
9 mm (L)	0217040-1	RED	100	1.000
9 mm (L)	0217041-1	BLUE	100	1.000
12 mm (S)	0217044-1	RED	100	1.000
12 mm (S)	0217045-1	BLUE	100	1.000



## Safety Collar for ASFA L and S worm-drive clamps

The Safety Collar is an ideal solution which prevents the screwdriver from slipping out of the slot in the screw while tightening. It is easy to assemble and extremely useful. The slot is easily accessible while the collar helps to hold the screwdriver in place. Available in two colours, red and blue, which help to identify the material quality of the clamp: (Red: W1 and W2 - Blue: W3, W4 and W5).

Application Ø	Part n°	Colour	Box Quantity (M00)	Outer Packing
All Ø available ASFA L and S	0217037-1	RED	100	1.000
All Ø available ASFA L and S	0217038-0	BLUE	100	1.000